

Overview

KEMET's ERO610 series encapsulated radial leaded ceramic disc capacitors are specifically designed for interference-suppression AC line filtering applications. Having internationally recognized safety certifications, these capacitors are well-suited for applications that require keeping potentially disruptive or damaging line transients and EMI out of susceptible equipment. They are also an ideal solution when needing to suppress line disturbances at the source.

Safety Certified Capacitors are classified as either X and/ or Y capacitors. Class X capacitors are primarily used in line-to line (across-the-line) applications. In this application there is no danger of electric shock to humans should the capacitor fail, but could result in a risk of fire. The class Y capacitor is primarily used in line-to-ground (line by-pass) applications. In this application, failure of the capacitor could lead to danger of electric shock. With a working voltage of 760 VAC in line-to-line (Class X) and 500 VAC in line-to-ground (Class Y) applications, these safety capacitors meet the impulse test criteria outlined in IEC Standard 60384. Meeting subclass X1 and Y1 requirements, these devices are certified to withstand impulses up to 4 KV (X1) and 8 KV (Y1) respectively. These encapsulated devices also meet the flame test requirements outlined in UL Standard 94V-0.





Packaging C-Spec Ordering Options Tables

Bulk Packaging ¹							
	LEAD LENGTH L	LEAD SPACING F					
			10 mm	12.5 mm			
	30 mm - 3 mm	0.6 mm	DF0	EF0			
Carainta la ada	30 11111 - 3 11111	0.8 mm	DJO	EJ0			
Straight leads	10	0.6 mm	DD0	ED0			
	10 mm ± 1 mm	0.8 mm	DH0	EH0			
	6 mm - 1 mm	0.6 mm/0.8 mm	DB0	EB0			
Drafermed leads inside arims		0.6 mm		EFG			
Preformed leads inside crimp	30 mm - 3 mm	0.8 mm		EJG			
Drafarmad landa autoida ariman	Г	0.6 mm	TE0	TG0			
Preformed leads outside crimp	5 mm ± 1 mm	0.8 mm	TF0	TH0			
Dreferred leads seen in	Minimum 2.8 mm	0.6 mm		QG0			
Preformed leads snap-in	Minimum 3.5 mm	0.8 mm		QH0			
Inline wire	Minimum 2.8 mm + 1.5 mm	0.6 mm	YE0	YG0			
Inline wire	Minimum 3.0 mm + 2.0 mm	0.8 mm	YF0	YH0			

¹ 5 mm and 7 mm lead spacing options are not available for ERP610 Series.

Reel Packaging Component Pitch 25.4 mm ¹						
		TAPING F				
Lead spacing F	spacing F 10 mm 12.5 mm					
Body diameter D		All dia	meters			
	H = 16.5 mm	DRT	ERT			
Straight leads	H = 18.0 mm	DRU	ERU			
	H = 20.0 mm	DRY	ERY			
Preformed leads inside crimp	H0 = 16.0 mm	– ERZ				
Preformed leads outside crimp	H0 = 16.0 mm	TDR	TER			
Inline wire	H0 = 16.0 mm	YRD	YRE			

¹ 5 mm and 7 mm lead spacing options are not available for ERP610 Series.



IRIW

- Safety Standard Recognized (IEC 60384-14)
- Reliable operation up to 125°C
- Class X1/Y1
- 10 mm and 12.5 mm lead spacing
- RoHS compliant
- Capacitance offerings ranging from 33 pF up to 4.7 nF
- Available capacitance tolerances of $\pm 10\%$ and $\pm 20\%$
- High reliability
- Preformed (crimped) or straight lead configurations
- · Non-polar device, minimizing installation concerns
- Encapsulation meets flammability standard UL 94V-0

Applications

Typical applications include line-to-Line (Class X) filtering, line to-ground (Class Y) filtering, antenna coupling, primary and secondary coupling (switching power supplies) and line disturbances suppression (motors and motor controls, relays, switching power supplies and invertors).

Approval Standard and Certification Number

Safety Standard	7TIGM@EXMSR	IVXM@EXI2YEV
VDE	EN 132400	40001993, 40001996
UL CAN/CSA	UL 60384-14 and E60384-14	E356389

These devices are VDE/ENEC recognized for antenna coupling and AC line-to-line (Class X) and line-to-ground (Class Y) applications per IEC60384–14.

Environmental Compliance

These devices are RoHS Compliant. They meet all requirements set forth by both EU and China RoHS directives.





0IESRKYEMSRW

	Straight Leads	Inside Kink	Outside Kink					
	S max,	Doating on least		Coating of lead shall			S max.	
Φd	0.6 or 0.8	Φd 0.6 or 0.8	Φd	0.6		0.6 0	or 0.8	
L	30 - 3 or 10 ± 1	F 7.5 10 12.5 A 4.0 ± 1.5 5.0 ± 1.5 6.0 ± 1.5	F	5.0	7.5	7.5	10.0	12.5
F e	5 7.5 10 12.5 3.0 mm Maximum	L 3.0 mm Minimum Tolerance: 1.0 mm absolute	A	5.0	5.0	6.0	6.0	6.0

	Snap-In Lea	ds		Verti	cal Crimp	
	Country on New York Country of Co	S max.			Point of support	Coating on load shall volve the set
Φd	0.6	0.8	F	7.5	10	12.5
F	7.5 / 10 / 12.5	7.5 / 10 / 12.5		0.6	0.0	0.0
L	2.8 mm Minimum	3.5 mm Minimum		0.6	0.8	0.8
Н	2.6	3.3	A	4.5 Maximum	6.0 Maximum	6.0 Maximum
P1	1.25	1.65		2.8	3.0	3.0
P2	1.65	1.95	L	Minimum 1.5	Minimum 2.0	Minimum 2.0
А	D - 8: 6.0 ± 1.5	D > 8: 7.0 ± 1.5		absolute	absolute	absolute



+IRIZPI/IGMIGEX/ISRW4/IS/QERGIEZ/GX//WX/IGW

Dielectric/Temperature Characteristic	U2J	Y5S	Y5T	Y5U	
Operating Temperature Range:	-40°C to +125°C				
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC):	-750 ±120 ppm/°C	±22%	+22%/-33%	22%/-56%	
Test Voltage Between Terminals	Component test: 4,000 VAC, 50 Hz, 2 seconds As repeated test admissible only once with 4,000 VAC, 50 Hz, 60 seconds Random sampling test (destructive test): 4,000 VAC, 50 Hz, 60 seconds				
Dielectric Strength of Body Insulation	4,000 VAC, 50 Hz,60 seconds (destructive test)				
¹ Dissipation Factor (tanδ) at +25°C ¹	0.50%	2.50%			
Insulation Resistance (IR) Limit at +25°C	10,000 MΩ Minimum (500 VDC applied for 60±5 seconds at 25°C)				

**C* = Nominal capacitance

¹ Capacitance and Dissipation Factor (DF) measured under the following conditions:

U2J: 1 MHz \pm 100 kHz and 1.0 \pm 0.2 Vrms

Y5S, Y5T and Y5U: 1 kHz ± 50 Hz and 1.0 ±0.2 Vrms

Note: When measuring capacitance, it is important to ensure the set voltage level is held constant. The HP4284 & Agilent E4980 have a feature known as Automatic Level Control (ALC). The ALC feature should be switched to "ON."

Table 1 – Product Ordering Codes and Ratings

					Dimensions (mm)			Lead Spacing	
Dielectric/ Temp. Char.	KEMET 4EVX2Y E V	Capacitance	Capacitance Tolerance	Body Diameter (Maximum)	Body Thickness (Maximum)	Lead Diameter	Bulk Packaging	Ammo Packaging	
U2J	ERP610W330	33 pF							
	ERP610W470	47 pF							
Y5S	ERP610W680	68 pF			6.0				
	ERP610W101	100 pF							
Y5T	ERP610W151	150 pF		8.0					
131	ERP610W221	220 pF							
	ERP610W331	330 pF					10		
	ERP610W471	470 pF	±10%			0.6			
	ERP610W681	680 pF	±20%			0.8	12.5	2.5	
	ERP610W102	1000 pF		9.0					
Y5U	ERP610W152	1500 pF		10.0					
130	ERP610W222	2200 pF		12.0	5.0				
	ERP610W272	2700 pF		13.0					
	ERP610W332	3300 pF		15.0					
	ERP610W392	3900 pF		13.0					
	ERP610W472	4700 pF		17.0					
	KEMET 4EVX2Y E IV	Capacitance	Capacitance Tolerance	Body Diameter (Maximum)	Body Thickness (Maximum)	Lead Diameter	Lead S	pacing	

(1) To properly complete ordering code, enter the three-digit alphanumeric "Packaging Code." See "Dimensions" section of this document, page 2, for available options.





Soldering and Mounting Information

7SPH/MRK7TIGM@EXMSRW							
Solderability Resistance to Soldering							
Soldering Temperature	235°C ± 5°C	260°C ± 5°C					
Solder Duration	2 seconds ± 0.5 seconds	10 seconds ± 1.0 seconds					
Distance from component body	≥ 2 mm	≥ 5 mm					
CSA (cUL recognition)	C 22.2 No. 1-M90 (Ur=250 VAC)	216038					

Soldering test for capacitors with wire leads: (according to IEC 60068-2-20, solder bath method)


Sodering Recommendations

When soldering this product to a PCB/PWB, do not exceed the solder heat resistance specification of the capacitor. Subjecting this product to excessive heating could reflow the solder joint between the lead and ceramic element and/or may result in thermal shocks that can crack the ceramic element.

Cleaning Recommendations

The components should be cleaned immediately following the soldering operation with vapor degreasers.

Marking

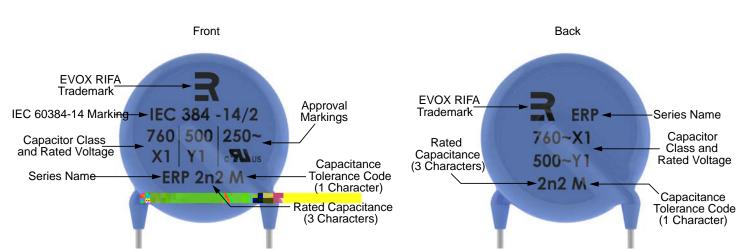


¹ EVOX RIFA and all associated products were acuired by KEMET in 2007. The EVOX RIFA trademark is still used on the capacitor marking.



Figure 1 - Ammo Pack Taping Format

&24**8**


B42)2&B/RGL 0)(734%2⊕

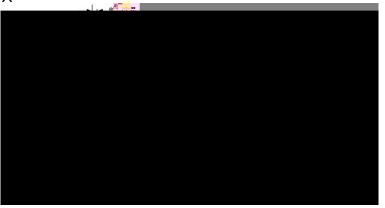

\$8248 13429)2€8-180/RGL 0)(%74%20⊕



882 1342928€80/RGL 0)(%74%2067€2

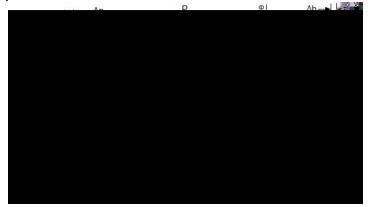



8EFPIK%QQS4EGO8ETMRKI/IGMGEK/ISRW

¹ 4 VIJVSQIH GVMQTIH PIEH GSR¤KYVEXMSRW MRGPYHI ZIVXMGEP OMRO SYXWMHI C sections of this document for further details.
² Also referred to as "lead length" in this document.



/))₿₽IG**%**RMG\$\$**V**S**₽**MISR**₽**PIW®®IW

For a complete list of our global sales offices, please visit www.kemet.com/sales.

Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicted or that other measures may not be required.