<b>T</b>	G	т	m	D	0







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 15

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65℃ to +175℃			
-Salt Spray	: 500 hours			

: 20.01 g ± 10%

8D 0

G

15

W

97

Ρ


F

Ν

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
PP	4.39±0.2				
R1	24.61				
R2	23.01				
S	31±0.3				
V	20.83+0/-1.25				
W	2.1/2.5				
Z	31.5 Max				
VV THREAD	M22x1-6g				

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

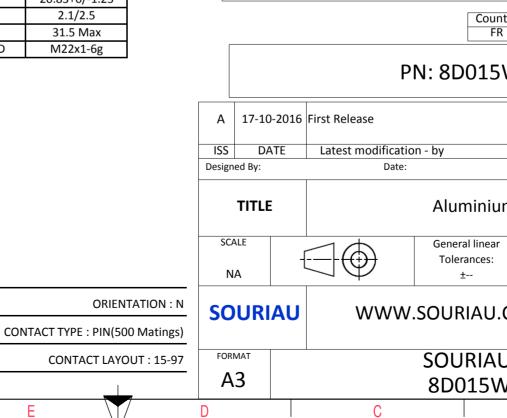

	Ξ		A		
					4
AS EXA	AMPLE				3
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)					
Intry R	Jurisd	liction & Contro Not Listed	DI LIST		2
5W97PN					
	1			MOD N°	
CUSTOMER DRAWING					
um Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1
	DRG N°			SHEET	
W9	7PN-C		A	1/2	J
	В	I	А		

r	т	Q	н т	m	D	0
		Contact Layout				Panel Cutou
4		$\begin{array}{c} & & & \\ & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & &$			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	B +.178	m)         (mm)         ID         (mm)         (mm)           (1.65)         +234 (5.64)         G         -207 (5.26)         -095 (2.41)           (4.52)         +.178 (4.52)         H         -234 (5.94)         +.066 (1.65)           (5.84)        023 (0.58)         J        178 (4.52)         +.178 (4.52)           (4.52)        178 (4.52)         K        065 (1.65)         +.234 (5.94)				
ω	Shell Arrangeme size no. 15 -97	ent         Number of contacts         Size contacts         Service rating         Contact location         Supersed           4         16         I         C,G,L,M         MS20052-           8         20         I         All others         MS20052-				Dim ØA ØAA R1 ØT
	F					SOURIAU shall not be liable for any due to a use of the Products wh
N						the Specifications issued by either of (professional recommendati
					A 17-10-20	PN: 8D015W
					ISS DATE Designed By: TITLE	Latest modification - by Date: Aluminium
					SCALE NA SOURIA	General linear Tolerances: ±
				-	FORMAT A3	SOURIAU 8D015W9
	Н	G	F	E	D	C

