
GT19 Series

— Connectors for window-mounted antennas —

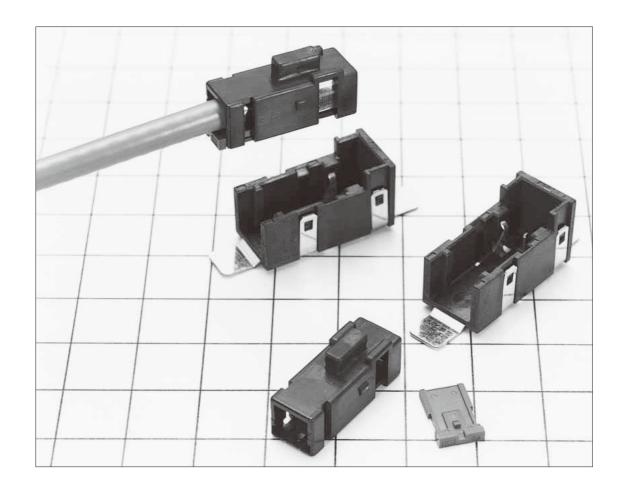

■ Features

Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

- Low cost cable assembly(GT19N)
 - Signal lines and shield can be crimped in a batch.
- Space-saving design(GT19S)

Compare with GT19N, mounting space is reduced by approximately 27%.

Applications


for window-mounted antennas.

GT19N Series

■ F Connectors

Terminals







| Part No. | HRS No. | Material/Plating or Color | Wire Size | Inner Insulation Diameter | Outer Diameter | Packaging | RoHS |
|--------------------------|---------------|--|--------------|------------------------------|-------------------|----------------|------|
| GT19N-2022/F3.3-5SCF(70) | 769-0001-1 70 | Insulator : PBT / Dark Gray Center terminals : Phosphor bronze / Tin plating Outer terminals : Brass / Tin plating | 20 to 22 AWG | φ 2.5 to 2.9 | φ 4.6 to 5.0 | 1,100 pcs/reel | YES |


Housing



| Part No. | HRS No. | Material | Color | Packaging | RoHS |
|-------------|------------|----------|-------|-----------|------|
| GT19N-1S-HU | 769-0002-4 | PBT | Black | 1 | YES |









■ Retainer (Used with GT19N-1S-HU)



| Part No. | HRS No. | Material | Color | Packaging | RoHS |
|------------|------------|----------|-----------|-----------|------|
| GT19N-1S-R | 769-0003-7 | PBT | Dark Gray | 1 | YES |








M Connectors


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.







Mated condition





| Part No. | HRS No. | Material/Plating or Color | Packaging | RoHS |
|-----------------|---------------|---|-----------|------|
| GT19N-1P-V(70) | 769-0004-0 70 | Housing: PPS / Black Center terminal: Brass / Tin plating | 1 | YES |
| G11011 11 V(707 | 700 0004 0 70 | Outer terminal: Copper alloy/Tin plating | • | |


23

GT19S Series


F Connectors

Center terminal










| Part No. | HRS No. | Material | Plating | Wire Size | Packaging | RoHS |
|---------------|------------|--------------|-------------|--------------|----------------|------|
| GT19S-30SCF | 769-0014-3 | Caman Allan | T 1.0 | 30 AWG | 3,000 pcs/reel | VEC |
| GT19S-2428SCF | 769-0021-9 | Copper Alloy | Tin plating | 24 to 28 AWG | | YES |

Insulated case






| Part No. | HRS No. | Material | Color | Packaging | RoHS |
|----------|------------|----------|-----------|-----------|------|
| GT19S-SC | 769-0015-6 | PBT | Dark Gray | 1 | YES |

Outside tube terminal








| Part No. | HRS No. | Material | Plating | Inner Insulation Diameter | Outer Diameter | Packaging | RoHS |
|------------------|------------|----------|-------------|------------------------------|----------------|-----------|------|
| GT19S-/1.6-2.9SC | 769-0016-9 | Brass | Tin plating | φ 1.5 to 2.0 | φ 2.6 to 3.0 | 1 | YES |


Housing













| Part No. | HRS No. | Material | Color | Packaging | RoHS |
|-------------|------------|----------|-------|-----------|------|
| GT19S-1S-HU | 769-0017-1 | PBT | Black | 1 | YES |


● Retainer (Used with GT19S-1S-HU)



Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.









| Part No. | HRS No. | Material | Color | Packaging | RoHS |
|------------|------------|----------|-----------|-----------|------|
| GT19S-1S-R | 769-0018-4 | PBT | Dark Gray | 1 | YES |


■ M Connectors




Mated condition







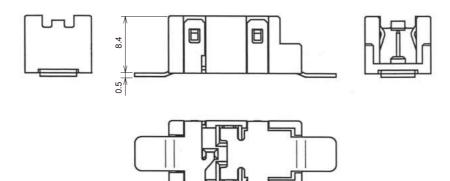


| Part No. | HRS No. | Material/Plating or Color | Packaging | RoHS |
|------------|------------|--|-----------|------|
| GT19S-1P-V | 769-0019-7 | Housing: PPS/Black Center terminal: Brass/Tin plating Outer terminal: Copper alloy/Tin plating | 1 | YES |

●Crimping tools

User's manuals are available. Please ask your Hirose Electric account representative.

Automatic Crimping Machine



Specifications

| Specification | Remarks |
|----------------------|--|
| 1.5ton | |
| 30mm | |
| 200spm (50Hz) | 240spm (60Hz) |
| 72kg | |
| 0.2kW | AC100V |
| 2,000~4,000 pieces/H | |
| | 1.5ton 30mm 200spm (50Hz) 72kg 0.2kW |

Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

| Applicators | | | |
|--------------------------|------------------|---------------------------|--------------|
| Terminal Product No. | Terminal HRS No. | Tool No. | Tool HRS No. |
| GT19N-2022/F3.3-5SCF(70) | 769-0001-1 70 | AP105-GT19N-2022/F33-5SID | 901-5090-0 |
| GT19S-30SCF | 769-0014-3 | AP105-GT19S-30S | 901-5150-0 |
| | | AP105-GT19S-30S-ID | 901-5167-3 |
| GT19S-2428SCF | 769-0021-9 | AP105-GT19S-2428S | 901-5178-0 |
| GT19S-/1.6-2.9SC | 769-0016-9 | GT19S-1.6-2.9S/CK-MP | 902-5516-7 |
| | | GT19S-1.6-2.9S/CK-MP3 | 902-5518-2 |

Note 1: Crimp heights are different for each style of cable. When using cables other than those recommended, please consult with Hirose.

When using cables other than those specified, Hirose will need to establish the correct crimp heights.

Note 2 : Before purchasing genuine Hirose tooling, please inquire if your intended cable has been approved for use on the Hirose tooling.

Note 3: When using cables other than those recommended, modifications to the tooling may be needed. Please consult with Hirose.