
т о т т	
Keying Shown as example	LAYOUT SHOWN AS EXAMPLE
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium -Shell Plating : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C -Salt Spray : 48 hours -Mass : 14.8 g ± 10%	PN: 8D511F04PN A 15-10-2016 First Release ISS DATE Latest modification - by MOD N Designed By: Date: CUSTOMER DRAWING
BASIC SERIES: 8D 5 - 11 F 04 P N	TITLE Aluminium Plug 8D series SCALE General linear NPRDS / PROJECT NA Tolerances: 859
SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings)	NA ± CSS SOURIAU WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission

r		۵	וד	m	D	0
		Contact Layout				
4	- <u>x</u>	$ \begin{array}{c} $				
	Shell Arrangement Numb size no. 11 -4 4	X-axis (mm) Y-axis (mm) +0.65 (1.65) +.005 (1.65) +.065 (1.65) 065 (1.65) 065 (1.65) 065 (1.65) 065 (1.65) +.065 (1.65) er of Size service Contacts rating location				
ω						
	L					
						SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR PN: 8D511
					A 15-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE	Alumir
_					SCALE NA	General linear Tolerances: ±
					SOURIA	
				, 	FORMAT A3	SOURIAU 8D511F
	Н	G	F	E	D	C

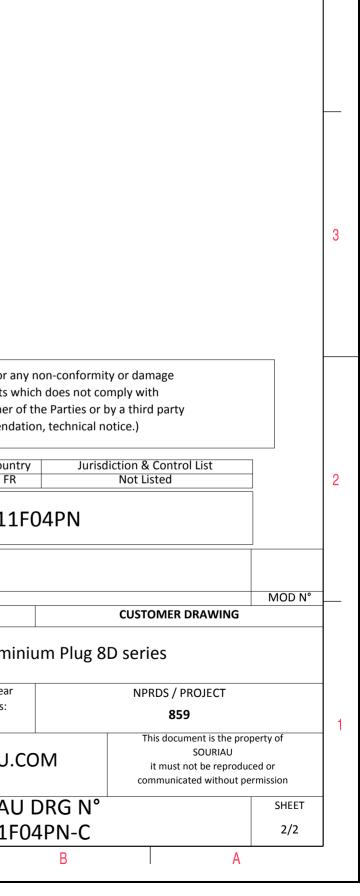

4