


THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

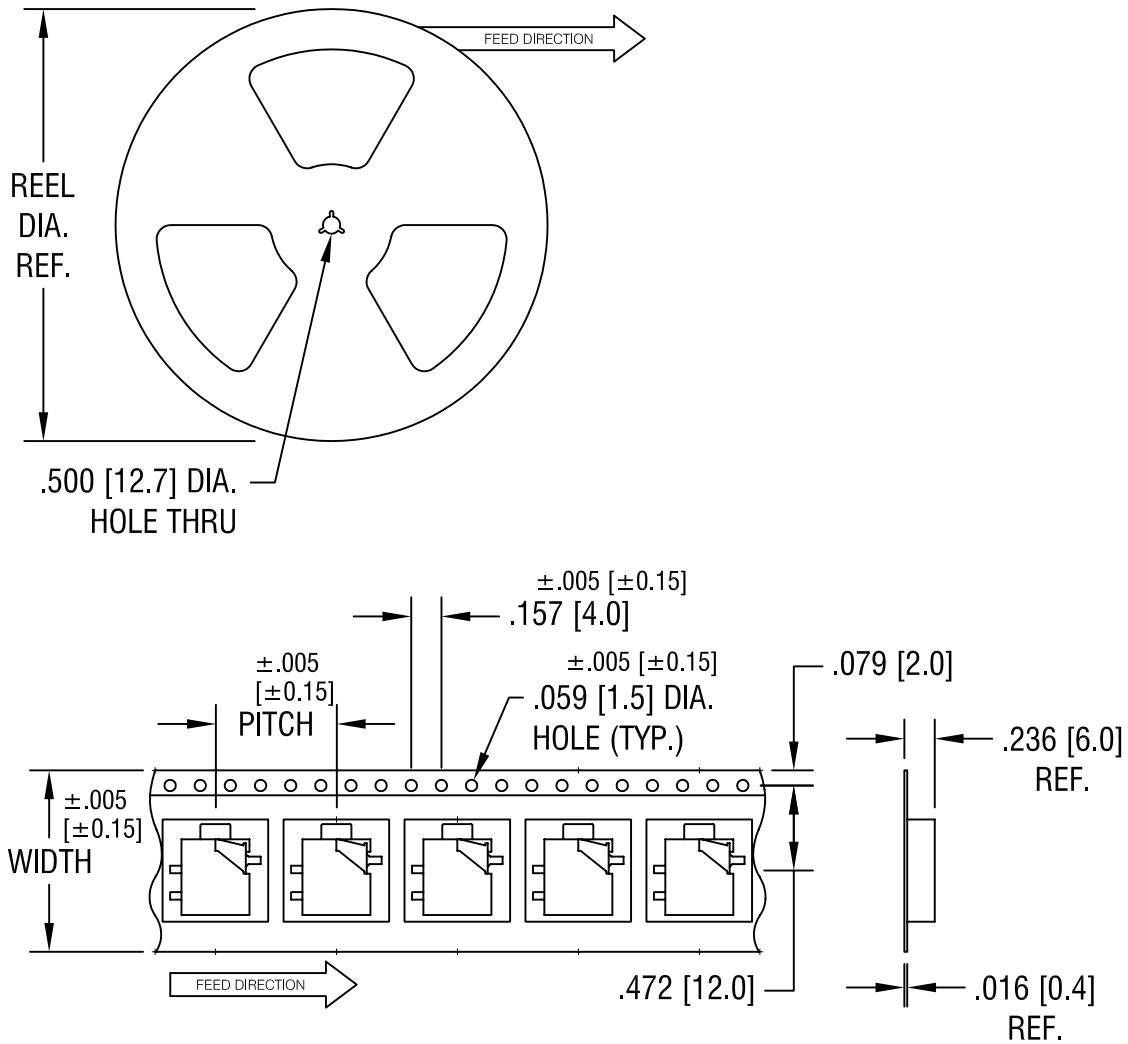

NOTES:

TAPE AND REEL SPECIFICATIONS:

1. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER

ANSI/EIA-481 STANDARD

.945 [24.0] WIDE; .630 [16.0] PITCH

2. REEL:

15.0 [381.0] DIA. 1000 PIECES OF

PART NO. 982 PER REEL.

KEYSTONE ELECTRONICS CORP.

ASTORIA, N.Y. 11105-2017

PART NAME

2.5mm SM MONO JACK ON TAPE

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY

BOONE

DATE

2.28.00

APP'D

LN

SCALE

X

10.17.06

CHANGE AS PER ECN 06-066

A

TOLERANCES

INCH [MM]

CODE

DWG NO.

DECIMAL ±.015 [±0.38]

C/M

ANGULAR ± 1°
UNLESS OTHERWISE SPECIFIED

982TR





DATE

DESCRIPTION

REV.

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

ACTUAL SIZE

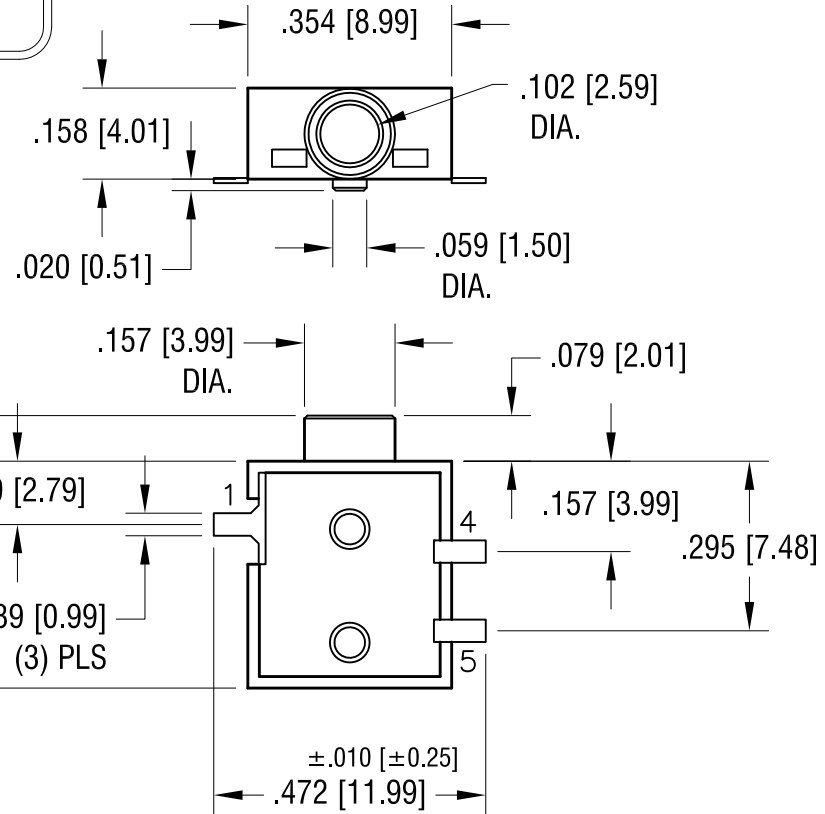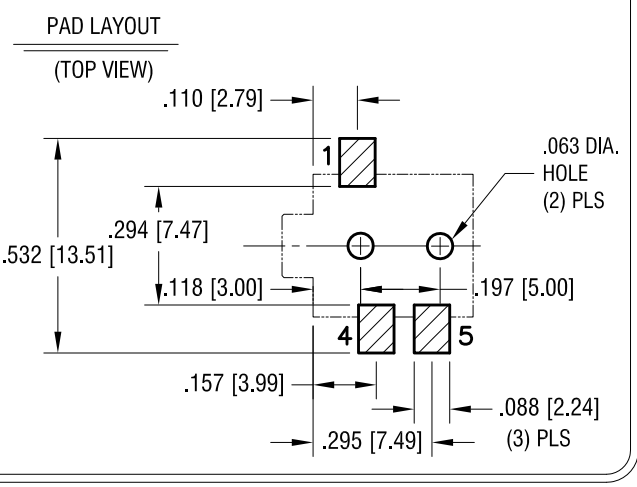

- NOTES:**
- MAT'L:**
HOUSING: MAT'L- LCP, UL 94V-0
GROUND TERMINAL: .012 [0.3] TH'K BRASS ①
SPRING CONTACT: .008 [0.2] TH'K PHOSPHOR BRONZE ⑤
SHUNT TERMINAL: .012 [0.3] TH'K BRASS ④
 - TAPE SPECIFICATIONS:**
MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD
24MM (.945) WIDE; 16MM (.630) PITCH
 - REEL SPECIFICATION:**
15 INCH DIA. 1000 PIECES

5.20.13	HOUSING WAS POLYAMIDE CHANGE AS PER ECR 13-041	A
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME 2.5mm SURFACE MOUNT MONO JACK			
MATERIAL AS NOTED			
FINISH GOLD FLASH		DRN BY BOONE	DATE 7.20.98
		APP'D LN	SCALE 3X
TOLERANCES	INCH [MM]	CODE	DWG NO.
DECIMAL	± .005 [± 0.13]	C	982
ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED			