
т	۵	п –	m	0





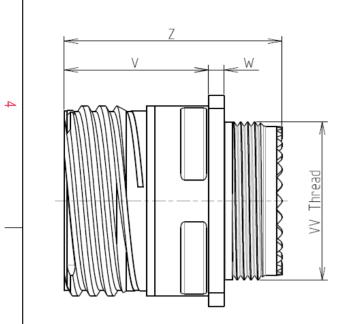

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

Н


-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				
-Salt Spray	: 500 hours				


: 11.9 g ± 10%

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			

Е

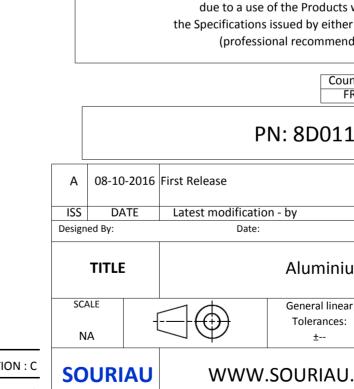

D

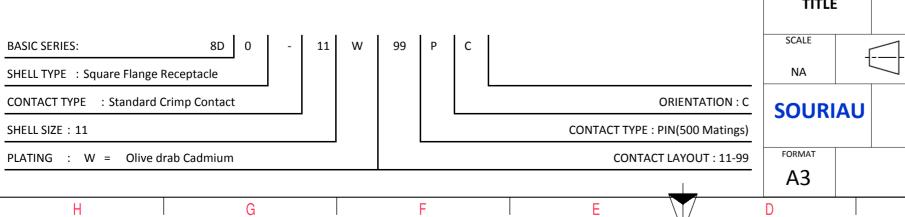

0		Φ		Þ		
						4
LAYOUT SHOWN AS EXAMPLE						
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country       Jurisdiction & Control List         FR       Not Listed         PN: 8D011W99PPC						2
rst Release						
Latest modificatio	n - by				MOD N°	
Date: CUSTOMER DRAWING Aluminium Receptacle 8D series						
$] \bigoplus$	General linear Tolerances: ±			RDS / PROJECT <b>859</b>		1
WWW.SOURIAU.COM       This document is the property of SOURIAU         it must not be reproduced or communicated without permission						
SOURIAU DRG N°         SHEET           8D011W99PC-C         1/2						
С		B		A		J

		۵	<u>п</u>	m		0
		Contact Layout				Panel Cutou
4	-×	$ \begin{array}{c}                                     $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Contr positi ID A B C C D C D F F G Shell Arrangement Numt size Arrangement Numt	(Insert arrangement 11-99)           Location           X-axis           (mm)         (mm)           +.065 (1.65)         +.113 (2.87)           +.130 (3.30)         +.000 (0.00)           +.065 (1.65)        113 (2.87)          065 (1.65)        113 (2.87)          065 (1.65)         +.113 (2.87)          065 (1.65)         +.113 (2.87)          065 (1.65)         +.113 (2.87)          065 (1.65)         +.113 (2.87)           +.000 (0.00)         +.000 (0.00)          065 (1.65)         +.113 (2.87)           +.000 (0.00)         +.000 (0.00)	7		2	ØT
ω	11 -99 7					Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D011V
					A 08-10-20 ISS DATE	016 First Release
					Designed By:	Date:
<u> </u>					SCALE	General linear Tolerances:
					SOURIA	
					FORMAT A3	SOURIAU 8D011W
	Н	G	F	E	D	С

