
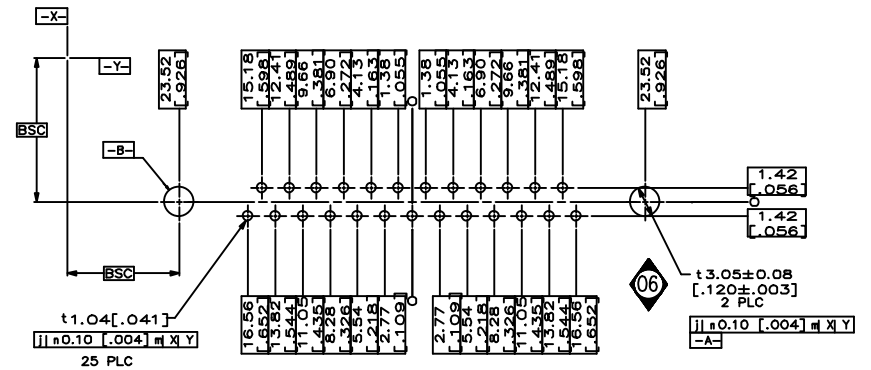


NOTES:

- MATERIAL
HOUSING: PBT, GLASS FILLED, UL RATED 94V-0, BLACK.
FRONT SHELL: CARBON STEEL.
CONTACTS, BOARDLOCKS AND INSERTS: BRASS
- FINISH
FRONT SHELL: TIN PLATED.
CONTACTS: GOLD FLASH OVER $2.54 \mu\text{m}$ [$.000100$] MIN NICKEL ON ENTIRE CONTACT AREA.
BOARDLOCKS AND INSERTS: NICKEL PLATED.
- ELECTRICAL SPECIFICATIONS:
17-30 OHMS AT 30 MHz, TYP.
22-37 OHMS AT 50 MHz, TYP.
29-40 OHMS AT 100 MHz, TYP.
- SCI, 56-422-001 AND DATE CODE MARKED ON THIS SURFACE.

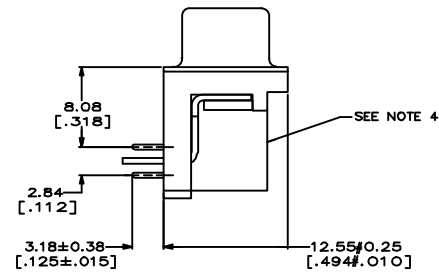

P.C. BOARD MOUNTING DIMENSIONS

REV	DESCRIPTION	DATE	BY	CHK	APP	REVISIONS	DATE	BY	CHK	APP	REVISIONS	DATE	BY	CHK	APP
6	REVISED PER 34554-ENG	18 AUG 87	JK	DH											
5	REVISED PER 34818-CPD	21 MAY 87	JK	DH											
4	REVISED PER 99146	04 NOV 86	DG	CL											

DESIGNED BY	D. GELTZ	DATE	04 NOV 86	MATERIAL	-	REV. NEXT	-
DRW	D. HENRY	DATE	04 NOV 86	FAIRVIEW, PENNSYLVANIA			
CHK	D. HENRY	DATE	04 NOV 86	FAIRVIEW, PENNSYLVANIA			
APP	D. HENRY	DATE	04 NOV 86	FAIRVIEW, PENNSYLVANIA			
TITLE	PLUG ASSEMBLY, 25 POSITION, RIGHT ANGLE, FERRITE						
SCALE	4:1	REVISED NO.	56-422-001	SHEET	1	OF	1

