


л Q Т	m		0	Φ		
R 22.6 Max true true to true to true to to to to to to to to to to to to to	S			WN AS EXAMPLE		
CHARACTERISTICS    -Standard : Based on MIL-DTL-38999 Series III    -Shell Material  : Aluminium    -Shell Plating  : Olive drab Cadmium    -Insulator  : Thermoplastic    -Contacts  : Copper Alloy    -Seals & Grommet  : Silicon Elastomer    -Contact Plating  : Gold over copper Alloy 0.8µm minimum    -Durability  : 500 Mating cycles    -Delivered with Souriau contacts and Accessories	nown as exampleConnector dimensionDimNominalA44.5±0.3B30.15+0.1/-0.15R32.5MaxS41.3±0.4W2.2+0.9/-0.1VV THREADM25x1-6g		the Specifications issued by (professional recon	ducts which does not con either of the Parties or by nmendation, technical no	nply with y a third party	
-Temperature Range : -65°C to +175°C -Salt Spray : 500 hours -Mass : 39 g ± 10%		A 01-10-2016 F ISS DATE Designed By: TITLE	Latest modification - by Date:	ninium Receptacle	customer drawing e 8D series	MOD
BASIC SERIES:  8D  7  -  17  W  06  P    SHELL TYPE  : Jam nut Receptacle	N ORIENTATION : N CONTACT TYPE : PIN(500 Matings) CONTACT LAYOUT : 17-06	SCALE NA SOURIAU FORMAT A3		ances: 	NPRDS / PROJECT 859 This document is the pro SOURIAU it must not be reprodu communicated without pe	iced or

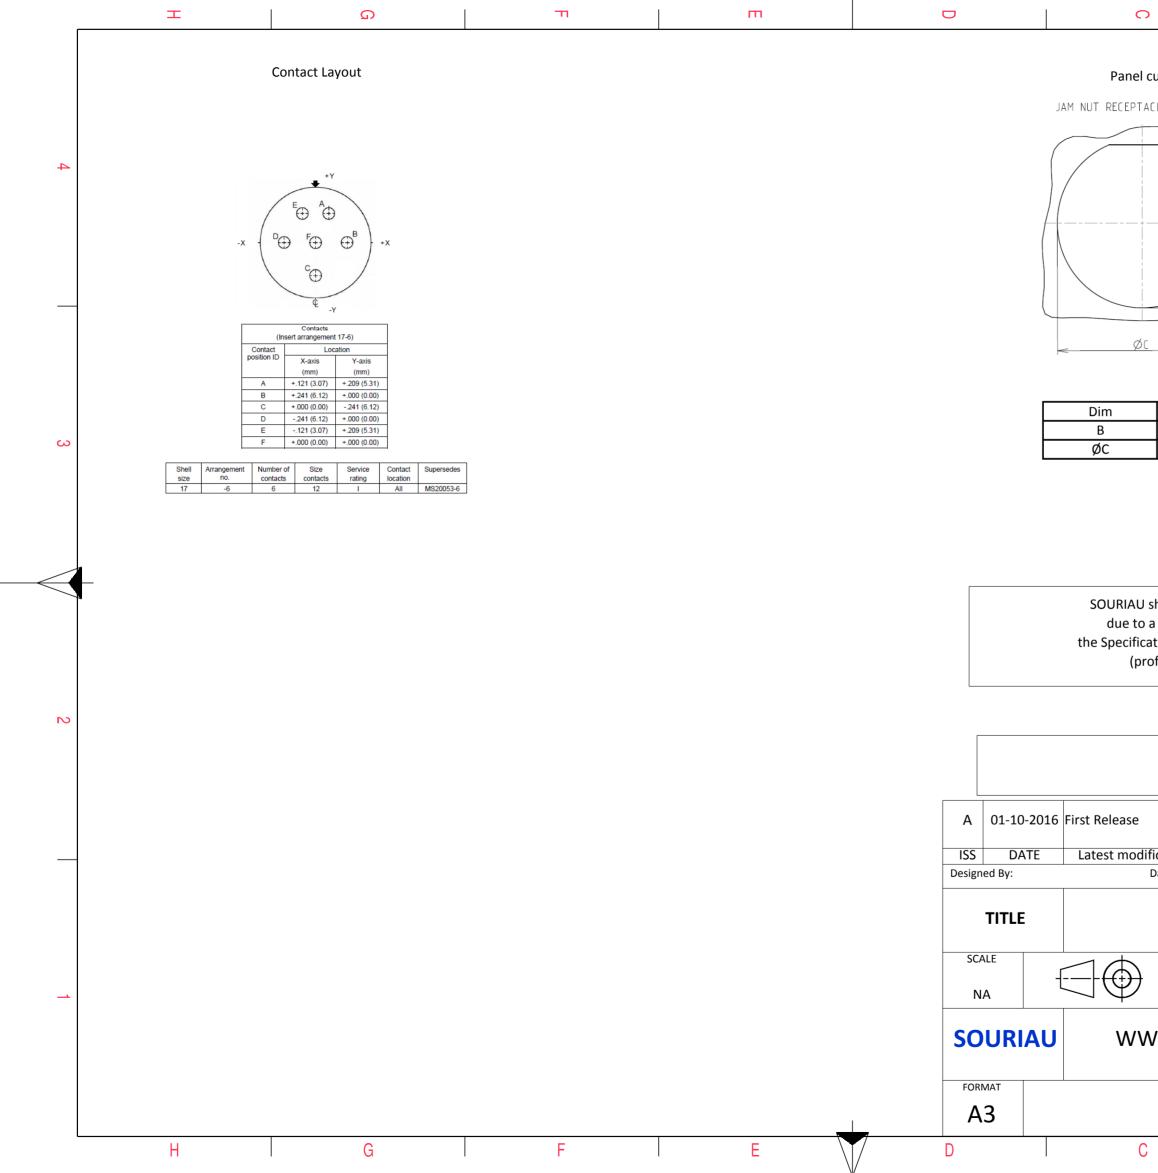

0		σ		A			
l cutou	t						
ACLE (T	YPE 7)						
					4		
δc							
/L	>						
30	Nominal 0.73+0/-0.25						
	2.01+0.25/-0				3		
o a use cations	of the Products issued by either onal recommend	any non-conformit which does not co r of the Parties or k dation, technical no ntry Jurisd	mply with by a third part				
	F	· ·	Not Listed		2		
Ρ	N: 8D717	W06PN					
1:f:+:	n hu						
dificatic Date:	ori - Dy		CUSTOMER	MOD N°			
	Aluminiu	um Receptacl	e 8D serie	es			
	General linea	r	NPRDS /	PROJECT	-		
ł	Tolerances:		85		1		
This document is the property of SOURIAU it must not be reproduced or communicated without permission							
SOURIAU DRG N°					-		
		NO6PN-C		2/2			
С		В		A			