


7 6 5 4 3 2 1

E

E

View on mating side

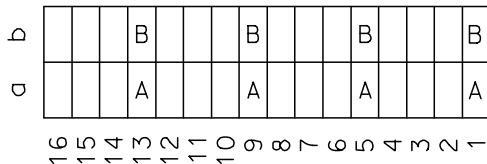

A = 4 standard contacts L=3  
 B = 4 standard contacts L=3  
 S = 8 total number of contacts

D

D

Marking	Standard
Performance level	G2/0 = Contact area level2 / Termination tin
Flux proof	no
Fixing clip	YES
Dimensions	SDA-85001-0002 sht.1
Technical Data	PS-85003-0001

C

C

B	G2/0	b1, b5, b9, b13
A	G2/0	a1, a5, a9, a13
Contact symbol	Perform. level	Contact position number

B

B

A

A

EC NO: 12005-0303 DRWN: SIVAKUMAR 2005/03/01 CHKD: SSUDHIR 2005/03/02 APPR: KPRASAD 2005/03/03 DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION																
	▽=0 □=0	<table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>2 PLACES</td> <td>±0.1</td> <td>±---</td> </tr> <tr> <td>1 PLACE</td> <td>±0.2</td> <td>±---</td> </tr> </table> ANGULAR ±1/2°		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±---	2 PLACES	±0.1	±---	1 PLACE	±0.2	±---	MM ONLY	1:1	METRIC	DRAWN BY DATE SIVAKUMA 2004/12/09 CHECKED BY DATE SSUDHIR 2004/12/09 APPROVED BY DATE SSUDHIR 2004/12/09 MATERIAL NO. 85001-9011	TITLE 32 POS. MALE DIN CONNECTOR DIN 41612 STYLE B/2 MOLEX INCORPORATED DOCUMENT NO. SD-85001-9011 SHEET NO. 1 OF 1
		mm	INCH																			
	4 PLACES	±---	±---																			
3 PLACES	±---	±---																				
2 PLACES	±0.1	±---																				
1 PLACE	±0.2	±---																				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		
A	REV		A/4																			

6

5

4

3

2

1