
		۵	П	Г		D	0	
4		V Thread					<image/>	YOUT SHOWN AS EXA
	CHARACTERISTICS -Standard : Based on MIL-DTL-38999 S	Series III	Keying Shown a	as example Connector di Dim	mension Nominal			
	-Shell Material : Aluminium -Shell Plating : Olive drab C -Insulator : Thermoplas -Contacts : Copper Allo	admium tic		ØS Z VV THREAD	29.4 Max 31 Max M18x1-6g		due to a use the Specifications	not be liable for any n of the Products whicl issued by either of th onal recommendation
N	-Seals & Grommet : Silicon Elast -Contact Plating : Gold over co -Durability : 500 Mating -Delivered with Souriau contacts and	opper Alloy 0.8µm minimum cycles					Р	Country FR N: 8D513W
_	-Temperature Range <u>-</u> -65°C to +1 -Salt Spray : 500 hours -Mass : 21.04 g ± 10					A 19-10-2 ISS DAT Designed By:	2016 First Release E Latest modificatio Date:	n - by
_	BASIC SERIES: SHELL TYPE : Plug with RFI Shielding	8D 5 - 13 V	V 04 P N			SCALE NA		Aluminiu General linear Tolerances: ±
	CONTACT TYPE     : Standard Crimp Contact       SHELL SIZE : 13     CONTACT TYPE : PIN(500 Matings)       PLATING     : W = Olive drab Cadmium						<b>WWW</b>	.SOURIAU.CC SOURIAU [
	H	G	F	E		A3	C	8D513W0



r	т	G	н <b>г</b>	m		0
		Contact Layout				
4	×	$ \begin{array}{c}                                     $				
	Conta position A B C D Shell Arrangement N size no. c 13 -4	+.000 (0.00)         +.150 (0.81)           +.146 (3.71)         +.035 (0.89)           +.000 (0.00)        083 (2.11)          146 (3.71)         +.035 (0.89)				
ω						
	F					
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either o (professional recommendat
N						Countr FR
						PN: 8D513V
					A 19-10-20 ISS DATE	16 First Release Latest modification - by
					Designed By:	Date:
					SCALE	Alumir
<b>_</b>					NA	General linear Tolerances:
					SOURIA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU
Ĺ	Н	G	F	E	D	8D513W

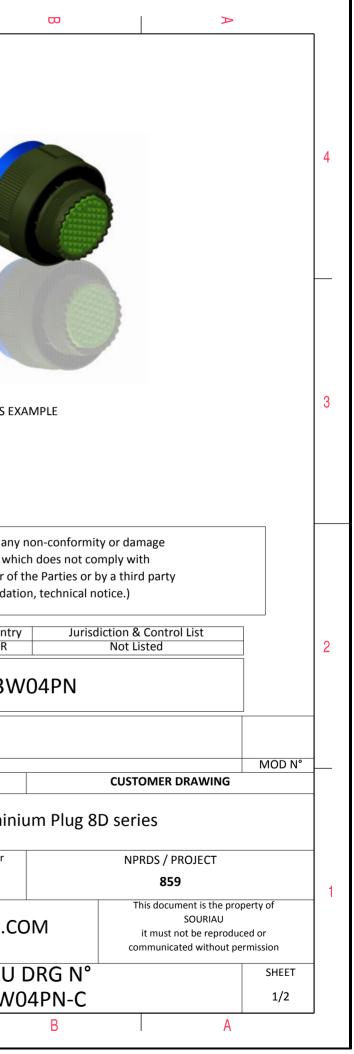