
<u>٦</u> ۵	п	m			0	Φ	A	
	Dead Dead Dead Dead Dead Dead Dead Dead							4
	Keying Sh	nown as example			LAYOUT SHOW	IN AS EXAMPLE		3
CHARACTERISTICS		Connector dimension						
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium -Shell Plating : Black Zinc Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Allo -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessorie -Temperature Range : -65°C to +175°C		DimNominalØS25 MaxZ31 MaxVV THREADM15x1-6g			due to a use of the Product the Specifications issued by e (professional recomr PN: 8DS	nendation, technical notice.) Country Jurisdiction	vith ird party	2
-Salt Spray : 500 hours -Mass : 17.15 g ± 10%				A 18-10-2016 ISS DATE Designed By:	First Release Latest modification - by Date:	CUS	MOD N TOMER DRAWING	<u> ° </u>
				TITLE Aluminium Plug 8D series				
BASIC SERIES: 8D 5 SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11	- 11 Z 02 B	N ORIE	ENTATION : N 500 Matings)	SCALE NA SOURIAU	General I Toleran ± WWW.SOURIA	ces:	PRDS / PROJECT 859 This document is the property of SOURIAU it must not be reproduced or communicated without permission	1
PLATING : Z = Black Zinc Nickel			YOUT : 11-02	FORMAT A3		IAU DRG N° 11Z02BN-C	SHEET 1/2	
H G	F	E		D	C	В	A	

	Ŧ	۵	н г	m		0	
		Contact Layout					
4	. ×. (2)	+Y B A A A A A A A A A A A A A					
	Cont posit ID A B Shell Arrangement size no. 11 -2	tion X-axis Y-axis (mm) (mm) + .095 (2.41) +.000 (.00)					
ω							
	L						
						SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recor	oducts w y either (
N							Count FR
						PN: 80	0511
						116 First Release	
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE	4	Alumi
_					SCALE NA	-{	ral linear rances: ±
					SOURIA	U WWW.SOUR	RIAU.(
					FORMAT	SOU	IRIAL
		1	Γ	r r	A3	8D5	511Z
	Н	G	l F	E	D	C	

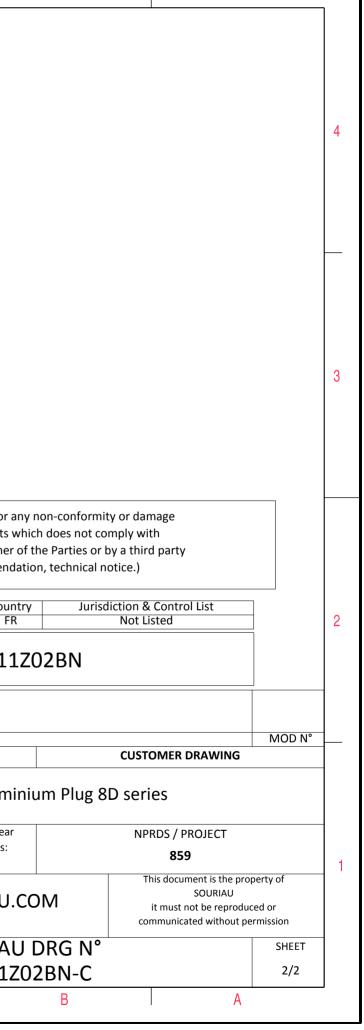

 \triangleright

σ