



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 15

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 500 hours			

: 19.54 g ± 10%

8D 0

G

15

W

05

Ρ

F

D


Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.39±0.2			
R1	24.61			
R2	23.01			
S	31±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M22x1-6g			


ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 15-05



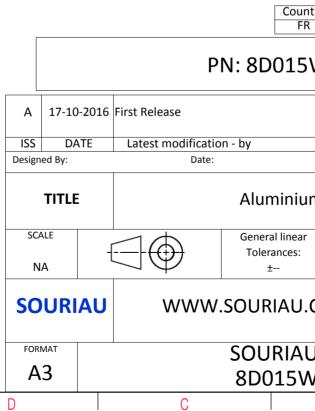

	Ξ		A				
	Car				4		
		3					
S EXA	AMPLE				3		
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)							
Intry R	Jurisdiction & Control List Not Listed				2		
5W	W05PD						
				MOD N°			
		CUSTOMER	R DRAWING				
um	m Receptacle 8D series						
ar	NPRDS / PROJECT 859				1		
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
				SHEET			
VVU)5PD-C B		A	1/2	J		

		۵	וד	m		0	
		Contact Layout				Panel Cut	tou
4	•	$ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ &$			7	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
		Location X-axis Y-axis (mm) (mm) +.000 (0.00) +.100 (2.54) +.174 (4.42) +.024 (0.61) +.094 (2.39) 148 (3.76) 094 (2.39) 148 (3.76) 174 (4.42) +.024 (0.61)			2		
ى ن						Dim ØA ØAA R1 ØT	
	-					SOURIAU shall not be liable for due to a use of the Products	wh
2						the Specifications issued by either (professional recommend Court F	dat
					A 17-10	2016 First Release	ÿV
					ISS DA Designed By:	TE Latest modification - by Date:	
1					SCALE NA	Aluminiu General linear Tolerances:	r
					SOURI		.C
					FORMAT A3	SOURIA 8D015V	
	Н	G	F	E	D	С	

