
Г	T	۵	т	т		0	Φ	Þ		٦
4		Deault V								4
ယ						LAYOUT SHO	WN AS EXAMPLE			3
			Keying Shown as example							
	CHARACTERISTICS			nector dimension						
	-Standard : Based on MIL-DTL-38999 Series	111	Dim	Nominal						
	-Shell Material: Aluminium-Shell Plating: Black Zinc Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer		ØS Z VV THRE	25 Max31 MaxADM15x1-6g		due to a use of the Pro the Specifications issued by	le for any non-conformity or d ducts which does not comply w either of the Parties or by a th nmendation, technical notice.)	vith ird party		
N		Alloy 0.8µm minimum						& Control List Listed		2
	-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories					PN: 8D511Z98PC				
	-Temperature Range : -65°C to +175°C				A 18-10-2016	6 First Release				1
	-Salt Spray : 500 hours -Mass : 14.7 g ± 10%				ISS DATE Designed By:	Latest modification - by Date:	CUS	TOMER DRAWING	MOD N°	
					TITLE	TITLE Aluminium Plug 8D series				
_	BASIC SERIES: 8D SHELL TYPE : Plug with RFI Shielding	5 - 11 Z 98	P C		SCALE NA	Genera Tolera ±	inces:	IPRDS / PROJECT 859		1
	CONTACT TYPE : Standard Crimp Contact ORIENTATION : C CONTACT TYPE : 11 CONTACT TYPE : PIN(500 Matings)				SOURIAU WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission			d or		
	SHELL SIZE : 11 CONTACT TYPE : PIN(500 Matings) PLATING : Z = Black Zinc Nickel CONTACT LAYOUT : 11-98				FORMAT SOURIAU DRG N°			SHEET	_	
				CONTACT LATOUT . 11-30	A3		511Z98PC-C		1/2	
	Н	G	F	E	D	<u> </u>	B			

Contact avoid		т	۵	г т			0	
	[
			Contact Layout					
Image: Source and the second secon	4	-x	(^E ⊕ ⊕ ^E ⊕ ^B)±×					
Co SUURAU shall not be liable for due to a use of the Products the Specifications issued by either (professional events) PN: 8D511 A 18-10-2016 Tirst telease ISS DATE Latest modification - by Designed Sy. Court PN: 8D511 Court PN: 8D511 PN: 8D		A B C D E	Contact location X-axis Y-axis (mm) (mm) 1 +.000 (0.00) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 0 065 (1.65) 130 (3.30) +.000 (0.00)					
SOURIAU shall not be liable for due to a use of the Products the Specifications issued by ether (professional recomment (professional recomment (profe			acts contacts rating location					
N N N N N N N N N N N N N N	ယ							
N N N N N N N N N N N N N N		_						
Image: Source of the second							due to a use of the Pro the Specifications issued by	oducts w either o
Image: Source of the second	N							Count
ISS DATE Latest modification - by Designed By: Date: TITLE Alumi SCALE NA Control NA SOURIAU FORMAT A3 SOURIAU							PN: 80	
Designed By: Date: TITLE Alumi SCALE Image: SCALE NA Image: Scale NA Image: Scale SOURIAU WWW.SOURIAU. FORMAT SOURIAU A3 8D5112						A 18-10-20	116 First Release	
SCALE NA SOURIAU FORMAT A3 SOURIAU SOURIAU A3 SOURIAU SOURIAU A3 SOURIAU SOURIAU								
NA Tolerances: ± SOURIAU WWW.SOURIAU. FORMAT SOURIAU A3 8D5112						TITLE	4	Alumir
FORMAT SOURIAU A3 8D5112	<u> </u>							ances:
A3 8D5112						SOURIA	U WWW.SOUR	IAU.C
\mathbb{V}	l	Н	G	F	E	D		

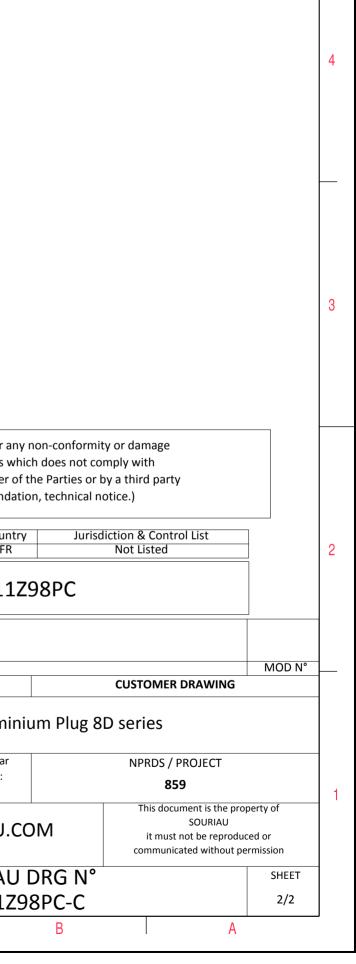

ω