

т	۵	п –	m	0



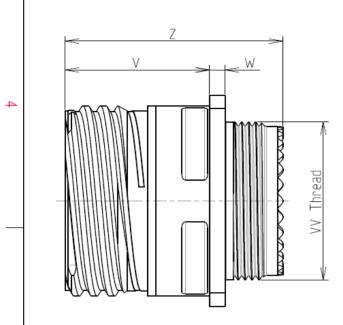

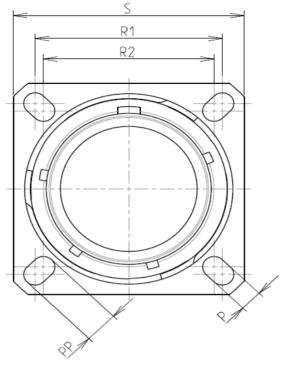

Keying Shown as example

## CHARACTERISTICS

ω

 $\sim$ 

-Mass

BASIC SERIES:


-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Black Zinc Nickel				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	65°C to +175°C				
-Salt Spray	: 500 hours				

: 22.11 g ± 10%

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
РР	4.93±0.2				
R1	23.01				
R2	20.62				
S	28.6±0.3				
V	20.83+0/-1.25				
W	2.1/2.5				
Z	31.5 Max				
VV THREAD	M18x1-6g				

m	D		C		Φ		
				YOUT SHOWN AS EXA	AMPLE		4
ople Connector dimension Dim Nominal P 3.25±0.2		[					
PP   4.93±0.2     R1   23.01     R2   20.62     S   28.6±0.3     V   20.83+0/-1.25     W   2.1/2.5     Z   31.5 Max		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)					
HREAD M18x1-6g						] 2	
		A 17-10-2016 S DATE igned By:	First Release Latest modificatio Date:	on - by	CUS	TOMER DRAWING	MOD N°
		TITLE	•				
		NA	$\exists \Phi$	General linear Tolerances: ±		PRDS / PROJECT 859	
ORIENT CONTACT TYPE : SOCKET(500		DURIAU   This document is the proper     SOURIAU   SOURIAU     it must not be reproduced   it must not be reproduced			ced or		
CONTACT LAYOUT : 13-26		A3	SOURIAU DRG N° 8D013Z26SA-C				SHEET 1/2
E	D		С		В	A	

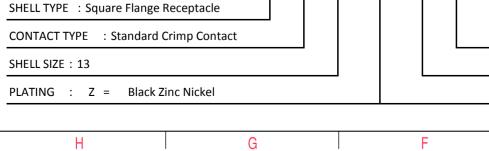

13

-

Ζ

26

S

Α

8D 0

_	т	G	п П	m	D	0
		Contact Layout				Panel Cutou
4	(	26 <sup>9</sup> 9 9 <sup>2</sup> <sup>3</sup> <sup>1</sup> <sup>2</sup> <sup>8</sup> 8 2#12			22 -	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_	<b></b>	6#22D			¥	
ω	Ctc A B C D E F 1 2	13-26   X Y   0 3.47   2.47 4.34   2.47 -4.34   0 -3.47   -2.47 -4.34   -2.47 -4.34   3.25 0   -3.25 0				Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
N					[	Countr FR
					A 17-10-202	PN: 8D0132
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Aluminium
_					SCALE NA	General linear Tolerances: ±
					SOURIAU	J WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D013Z2
L	Н	G	F	E	D	С

