
			0	₿ >			
A Z ØS							
			LAYOUT SHOWN AS EXAM	IPLE			
	Keying Shown as example						
CHARACTERISTICS	Connector dimension	7					
-Standard : Based on MIL-DTL-38999 Series III	Dim Nominal						
-Shell Material : Aluminium -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer	ØS48 MaxZ31 MaxVV THREADM37x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
Note that the second secon			Country FR	Not Listed	:		
-Durability: 500 Mating cycles-Delivered with Souriau contacts and Accessories	-Durability : 500 Mating cycles						
-Temperature Range : -65°C to +200°C		A 06-10-20	016 First Release				
-Salt Spray : 48 hours		ISS DATE			MOD N°		
		Designed By:	Date:	CUSTOMER DRAWING			
		TITLE	TITLE Aluminium Plug 8D series				
→ BASIC SERIES: 8D 5 - 25 F SHELL TYPE : Plug with RFI Shielding	43 A C	SCALE	General linear Tolerances:	NPRDS / PROJECT 859			
CONTACT TYPE : Standard Crimp Contact			U WWW.SOURIAU.COM	it must not be reproduced	or		
SHELL SIZE : 25	CONTACT TYPE : PIN(5			communicated without permi			
	CONTACT LAY	1001.23-43	SOURIAU D	KG N [°]	SHEET		
PLATING : F = Nickel		A3	8D525F43/		1/2		

		۵		П	m			C	
		Contact Layout							
4	-								
_	Contact position ID Local X-axis (mm) A +.069 (1.75) B +.203 (5.16) C +.324 (8.23) D +.424 (10.77) E +.424 (10.75, 52) F +.531 (13.49) G +.531 (13.49) H +.424 (10.77, 20, 20, 20, 20, 20, 20, 20, 20, 20, 20	Contacts (Insert arrangement 25-43) tion Y-axis (mm) Contact position ID Lo 5.31 (13.49) Z -0.09 (175) +.495 (12.57) a +.172 (437) +.425 (10.80) b +.258 (6.55) +.326 (8.28) c +.344 (8.74) +.068 (1.75) g +.172 (437) 069 (1.75) f +.000 (0.00) 206 (6.21) g 172 (437) 326 (8.28) h 344 (8.74)	+ 344 (8.74) + 172 (4.37) + 000 (0.00) - 172 (4.37) - 344 (8.74) - 344 (8.74) - 344 (8.74)						
ω	K +.324 (8.23) L +.203 (5.16) M +.000 (0.00) N 203 (5.16) P 324 (8.23) R 424 (10.77) S 493 (12.52) T 531 (13.49) U 531 (13.49) V 493 (12.52) W 424 (10.77) X 324 (8.23) Y 203 (5.16)	$\begin{array}{rrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrr$	+.000 (0.00) +.172 (4.37) +.344 (8.74) +.344 (8.74) +.172 (4.37) +.000 (0.00) 172 (4.37) 172 (4.37) +.172 (4.37) +.000 (0.00) +.172 (4.37)						
	size no. co 25 -43	Inber of ntacts Size contacts Service rating rating Contact location 20 16 I <u>n.p.g.r.st.u.w.x.</u> All others	Supersedes MS20057-43						
								due to a use the Specifications	not be liable for any of the Products wh issued by either of onal recommendat
N							[Countr FR
									PN: 8D525F
						A ISS Desig		First Release Latest modificatio Date:	n - by
							TITLE		Alumin
<u> </u>							CALE -	$\bigcirc \bigcirc$	General linear Tolerances: ±
						SC	OURIAU	AU WWW.SOURIAU.C	
							RMAT		SOURIAU 8D525F4
	Н	G		F	E	D		С	

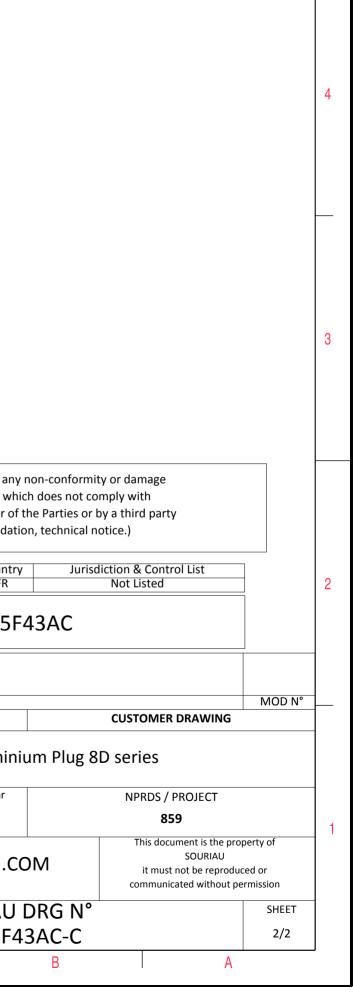

Þ

σ