

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	SP
Termination type	
IP rating	50
Cable Ø	4.00 - 5.20 mm
Matching parts	SKN.M08.GLLG
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	SA/Z*: Straight plug, key (N) or keys (P, S and T), with cable collet and nut for fitting a bend relief
Keying	3 key (alpha=30, plug: male contacts, receptacle: female contacts)
Housing Material	
Cable Fixing	∅ 4 - 5.2 mm
Variant	GZ : Gray collet nut for bend relief

### Performance

Configuration	
Insulator	
Rated Current	5.0 Amps


### Specifications

Test voltage (kV rms) Contact-contact:	1.50
Air clearance min. (mm) or Creepage distance min. (mm):	0.75

### Others

## DRAWINGS

### Draws

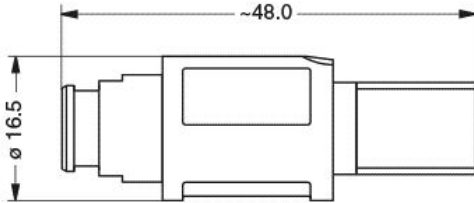

### Dimensions

	A	L
mm.	16.5	48
in.	0,65	1,89

---

## RECOMMENDED BY LEMO

### Tools

Crimp Tool: DPC.91.701.V

### Cables