



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	RE-F-06821	J.M.H.	H.O	00.04.06					

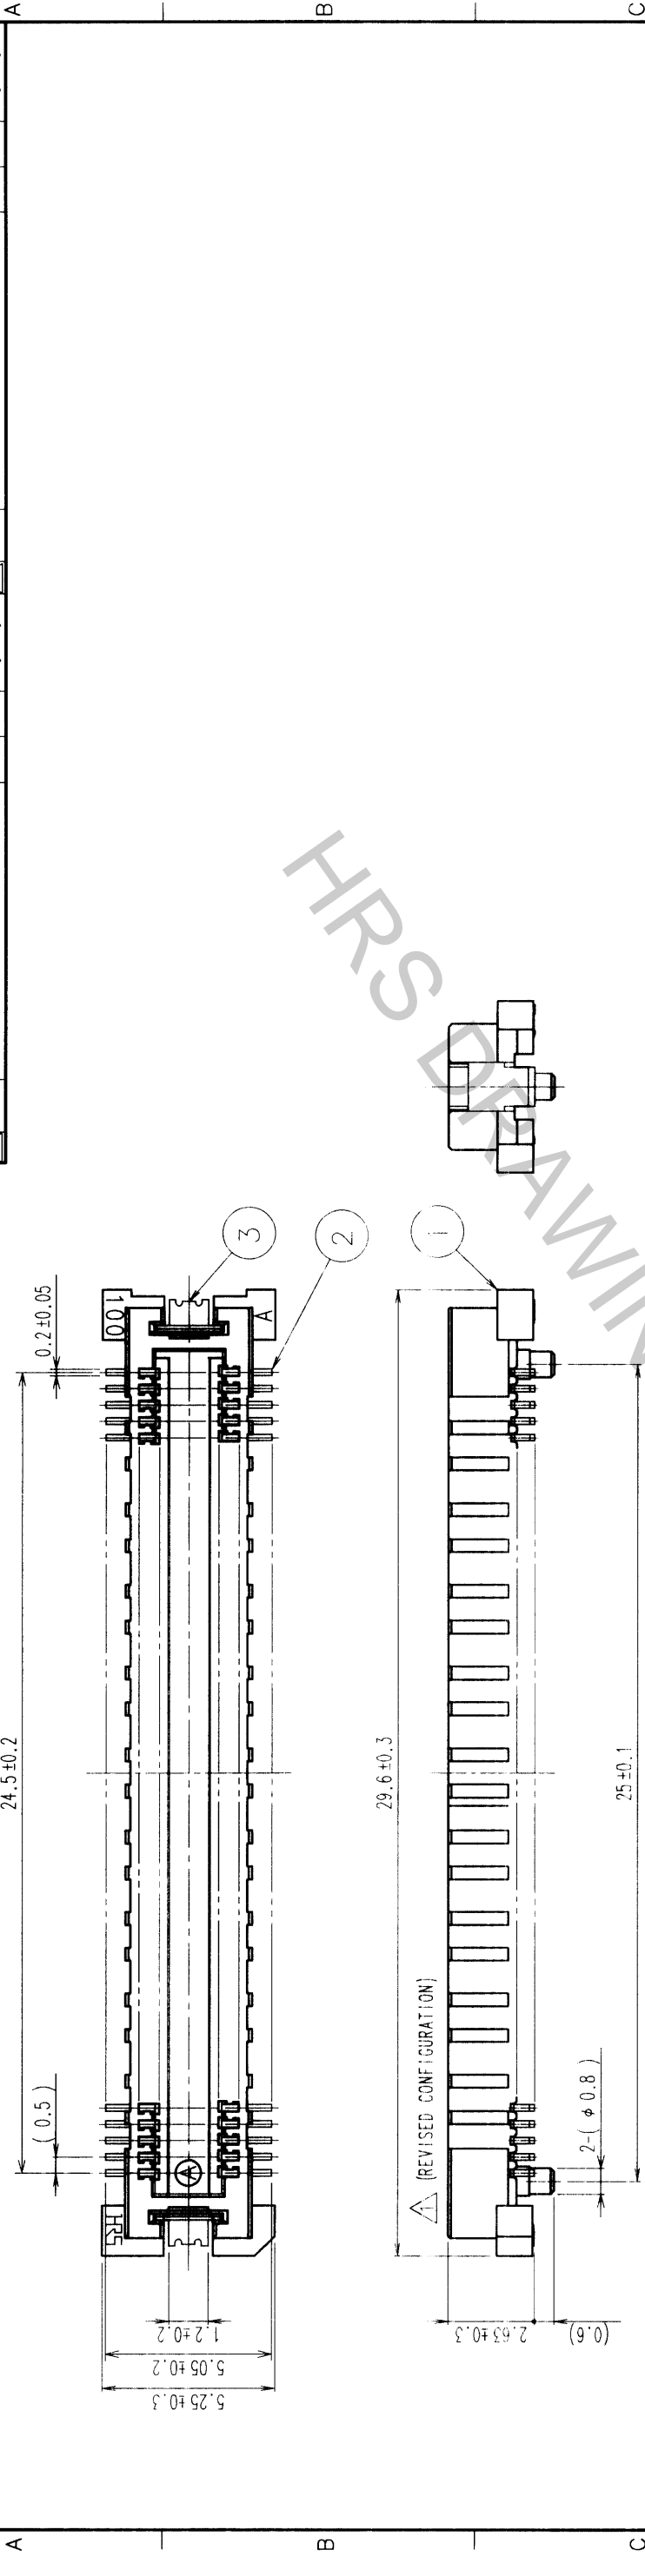

RECOMMENDED LAND PATTERN DIMENSION OF PCB

SIGNAL PORTION CROSS SECTION (10:1)

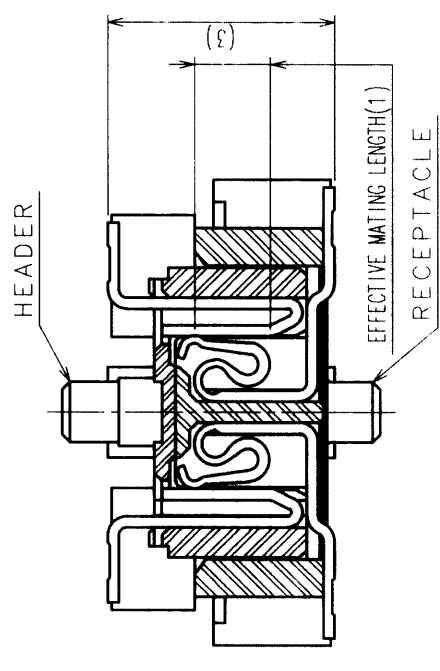

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1μm) OVER NICKEL LEAD: GOLD FLASH OVER NICKEL
1	LCP	BEIGE UL94V-0
NO.	MATERIAL	FINISH, REMARKS
		3 PHOSPHOR BRONZE TIN PLATED
CODE NO. (OLD)	CL	DRAWN
		J. MATSUKAWA
		DESIGNED
		M. ISHIDA
		CHECKED
		Y. YOSHIMURA
		APPROVED
		RELEASED

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATING PAIR CANNOT BE MATED.

DRAWING NO.	EDC3-152623	PART NO.	FX11A-100P-SV0.5
SCALE	5:1	CODE NO.	CL573-0643-1
UNITS	mm		

TO	
PCK	

HIROSE ELECTRIC CO., LTD.	6	7	8
FORM NO. 229			