
	工	G	нт. П	т	D	0





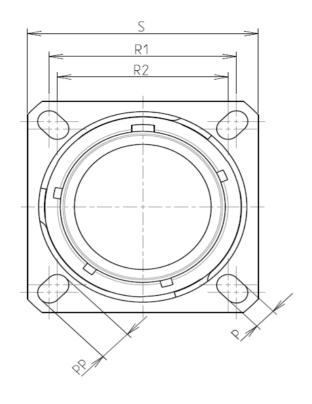

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium		
	-Shell Plating	: Black Zinc Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
	-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories				
	-Temperature Range	: -65℃ to +175℃		
	-Seals & Grommet -Contact Plating -Durability -Delivered with Souriau	: Silicon Elastomer : Gold over copper Alloy 0.8µm minimum : 500 Mating cycles i contacts and Accessories		

: 500 hours

: 11.64 g ± 10%

8D 0

G

11

Ζ

02

А


F

В

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M15x1-6g	

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

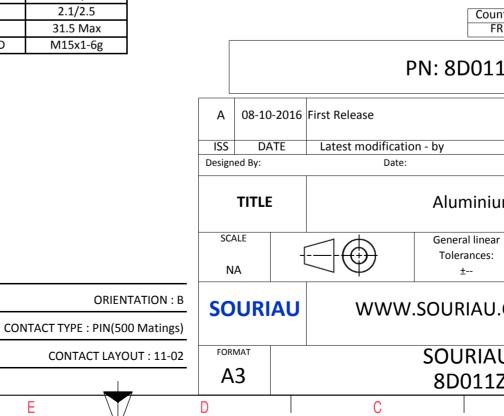

	ω		A				
		·					
					4		
AS EX4	AMPLE				3		
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)							
Intry R	Jurisdiction & Control List Not Listed						
1Z02AB							
				MOD N°			
	CUSTOMER DRAWING						
um Receptacle 8D series							
ar :	NPRDS / PROJECT 859						
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	DRG N°	1		SHEET			
.20	2AB-C B		A	1/2	J		

ſ	т	G		П	m	D	0	
		Contact Layout					r	Panel Cutou
4	 0. (2.	+Y +B +A + + + + + + + + + + + + + + + + +				2	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement size no. 11 -2	ion X-axis Y-axis (mm) (mm) + .095 (2.41) +.000 (.00) 095 (2.41) +.000 (.00)	Contact location All			V	Dim	<u>ø</u> t_
ω							ØA ØAA R1 ØT	A
	-						SOURIAU shall not be li due to a use of the F the Specifications issued (professional rec	Products wh by either of commendat
N							PN: 8	Countr FR 3D0112
						A 08-10- ISS DA Designed By:	2016 First Release E Latest modification - by Date:	
_						SCALE NA	Gen	uminium Ieral linear Ierances: ±
						FORMAT		IRIAU.C
	U			F		A3	80	D011Z
	Н	G	I	F	E \	D	C	I

