


Copyright FCI.

Printed: May 22, 2013

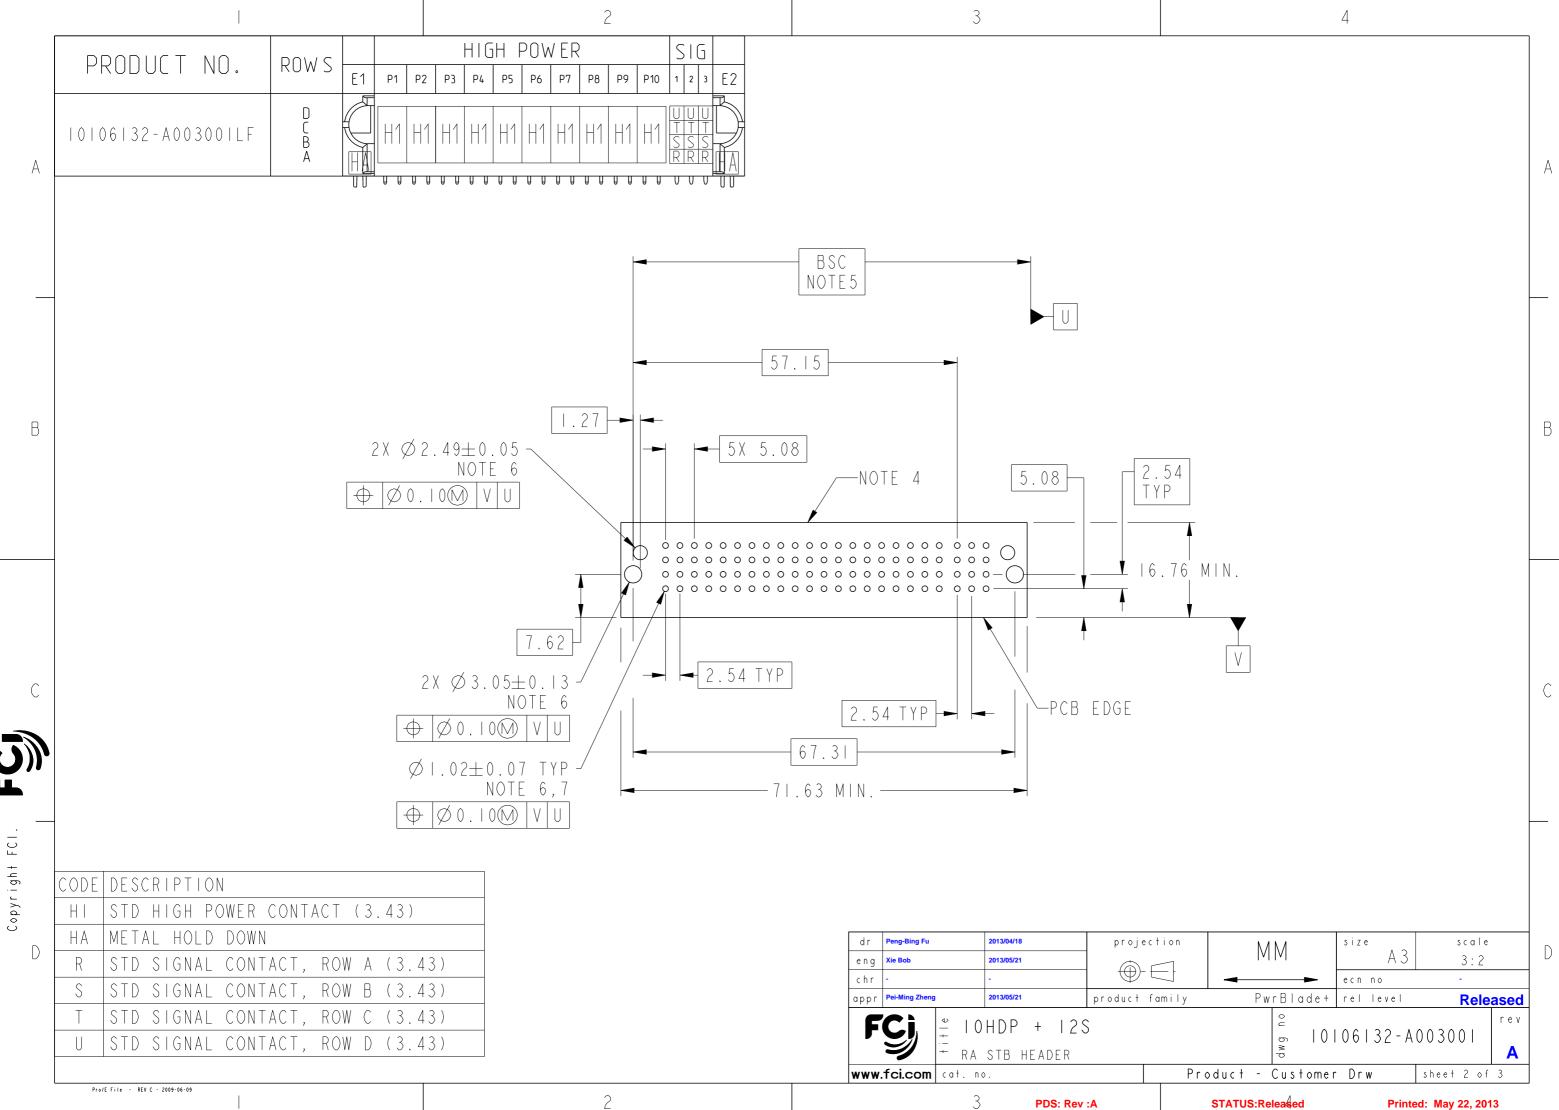

2

STATUS:Released

Printed: May 22, 2013

NOTES:

- I) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE. THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
 - -HOUSING GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
 - -SIGNAL CONTACT COPPER ALLOY.
 - -POWER CONTACT HIGH CONDUCTIVITY COPPER ALLOY.

2

- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) I.15±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658. APPLICATION SPECIFICATION REFER TO FCI GS-20-141. PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.

dr	Peng-Bing Fu	2013/04/18	proje	ction		size	scale
eng	Xie Bob	2013/05/21			ММ	A 3	3:2
chr	-	-	-		◄──►	ecn no	-
appr	Pei-Ming Zheng	2013/05/21	product	family	PwrBlade+	rel level	Released
FS IOHDP + 12S + ra stb header					о с б 0	06 32-A	.003001 rev
				ତ V (୬ ଅ			A
	/ww.fci.com cat. no.			Prod	uct – Customer	Drw	sheet 3 of 3

2

3

В

С

FCI

Copyright

D

А

4

А

В

С