

—	۵	П	m	D	0



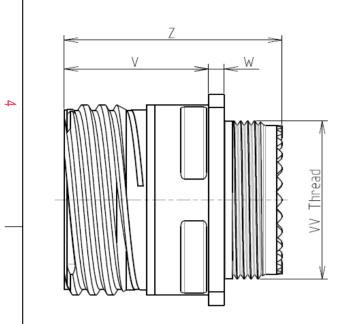

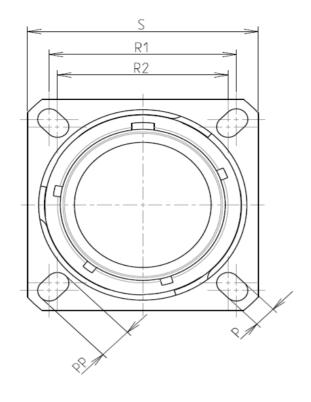

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				
-Salt Spray	: 500 hours				

: 15.12 g ± 10%

8D 0

G

11

W


99

S

F

В

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

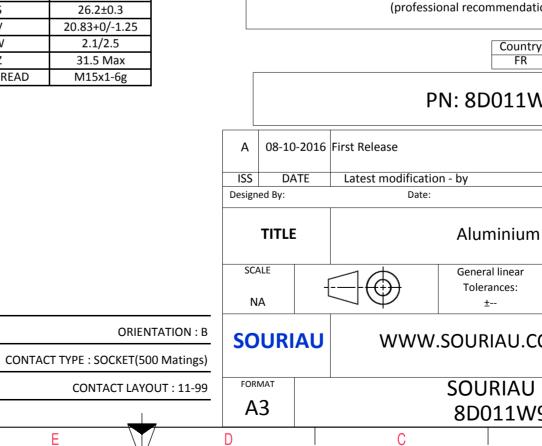

0		σ	1	A		
						4
LAY	YOUT SHOWN AS EXA	MPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\\hline FR \qquad Not Listed}$ PN: 8D011W99SB						2
First Release	n - by				MOD N°	
Date: CUSTOMER DRAWING Aluminium Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±			DS / PROJECT 859		1
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
	SOURIAU I 8D011W9				SHEET 1/2	
С		B		А		J

		۵	н п	m		0	
		Contact Layout				Pan	nel Cutout
4	-×	$ \begin{array}{c} $			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Contr positi ID A B C D D E F G Shell Arrangement Numb size no.	(Insert arrangement 11-99) Location V-axis (mm) (mm) +.065 (1.65) +.113 (2.87) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.113 (2.87) 065 (1.65) +.000 (0.00) 065 (1.65) Supersedes	1				
ω	size no. conti 11 -99 7					Dim ØA ØAA R1 ØT	
						SOURIAU shall not be liabl	le for any
						due to a use of the Proc the Specifications issued by (professional recom	ducts whi either of nmendati
N						PN: 8D	Country FR 011V
					A 08-10-20 ISS DATE Designed By:	016 First Release Latest modification - by Date:	
					SCALE	Alum General Tolera	
→					SOURIA		
					FORMAT A3	SOUF 8D0	RIAU 11W
	Н	G	F	E	D	C	

