


1. MATERIAL
 HOUSING: PBT, GLASS FILLED, UL RATED 94V-0, BLACK.
 FRONT SHELL: CARBON STEEL.
 BOARDLOCKS AND INSERTS: BRASS.
 CONTACTS: PHOSPHOR BRONZE
2. FINISH
 FRONT SHELL: TIN PLATED.
 CONTACTS: GOLD FLASH OVER 2.54 [m [.000100] MIN NICKEL ON ENTIRE CONTACT AREA.
 BOARDLOCKS AND INSERTS: NICKEL PLATED.
3. ELECTRICAL SPECIFICATIONS:
 17-30 OHMS AT 30 MHz, TYP.
 22-37 OHMS AT 50 MHz, TYP.
 29-40 OHMS AT 100 MHz, TYP.
- 4v SCI, 56-414-001 AND DATE CODE MARKED ON THIS SURFACE.

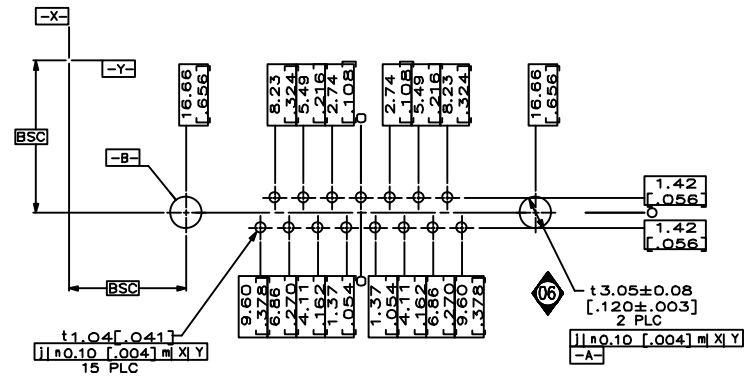

P.C. BOARD MOUNTING DIMENSIONS

REVISIONS		DATE		BY		CHK		APP		MATERIAL		REMARKS	
6	REVISED PER 36554-ENG	16	AUG 07	JLK	D.H.								
5	REVISED PER 34917-CPD	21	MAY 07	JLK	D.H.								
4	REVISED PER 99146	04	NOV 88	DG	GL								

DESIGNER	D.GELTZ	DATE	21 MAY 87
DRW	D.HENRY	DATE	21 MAY 87
CHECKED	D.HENRY	DATE	21 MAY 87
TITLE	RECEPTACLE ASSEMBLY, 15 POSITION, RIGHT ANGLE, FERRITE		
SCALE	4:1	SHEET	1 of 1
APPR	A1	PART NO.	56-414-001